



ISSUE	MODIFY DESCRIPTION	DATE

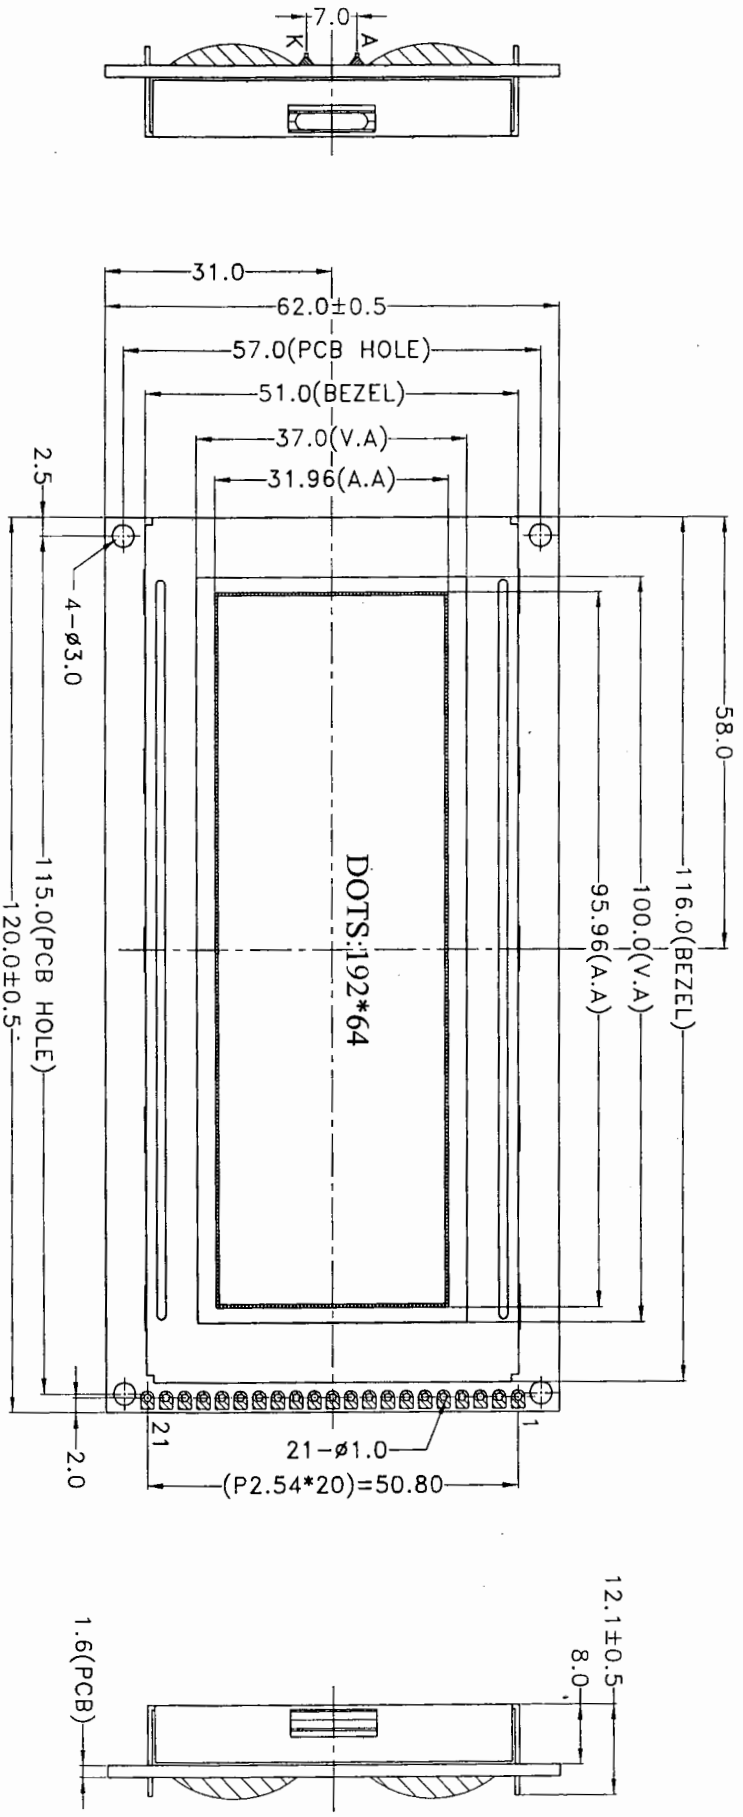

受控文件

Display Type	STN(Y-G)/TRANSFLECTIVE
Display Resolution	DOTS:192*64
Viewing Angle	6:00
Max Ratio and Bias Level	1/64 DUTY, 1/9 BIAS
LCD Controller/Driver	CS0107+CS0108(COB)
Logic Voltage	5.0V
LCD Driving Voltage	TBD
Operation Temperature	-0° C TO 50° C
Storage Temperature	-10° C TO 60° C
Backlight Speciality	LED SIDE(Y-G)
Remark	



ASSIGNMENT:

PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	VSS	8	D0	15	D7
2	VDD	9	D1	16	CS1
3	V0	10	D2	17	CS2
4	VBE	11	D3	18	CS3
5	RS	12	D4	19	RES
6	R/W	13	D5	20	SLA
7	E	14	D6	21	SLK

GEL LCD

TITLE:	Module Speciality		
ITEM NO:			
PROJECT NO:	JMG19264A02-09		
DESCRIPTION:	SFYL3YNNMC-06-CS-NSC		
◁: Special characteristic +: Safety characteristic Tolerance unless: x.x± 0.3	▽: Critical dimension (...): Reference dimension Otherwise specified: x.xx± 0.2		
 THIRD ANGLE PROJECTION	NAME	SIGN	DATE
DRAWN	Lan li juan		08.08.29
CHECKED	Lan li juan		08.08.29
CHECKED	Li li qiang		08.09.02
APPROVED	Wang zhao cai		08.09.02
REV: A	UNIT: mm	SCALE: 1/1	SHEET: 1 OF 1