
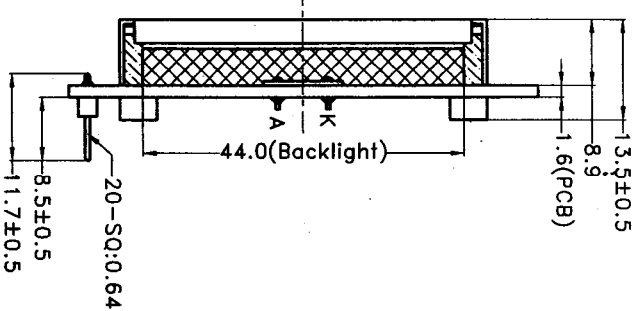



禁止品华环境管理物质

| ISSUE | MODIFY DESCRIPTION | DATE |
|-------|--------------------|----------|
| 1 | FIRST ISSUE | 06.05.27 |
| | | |
| | | |

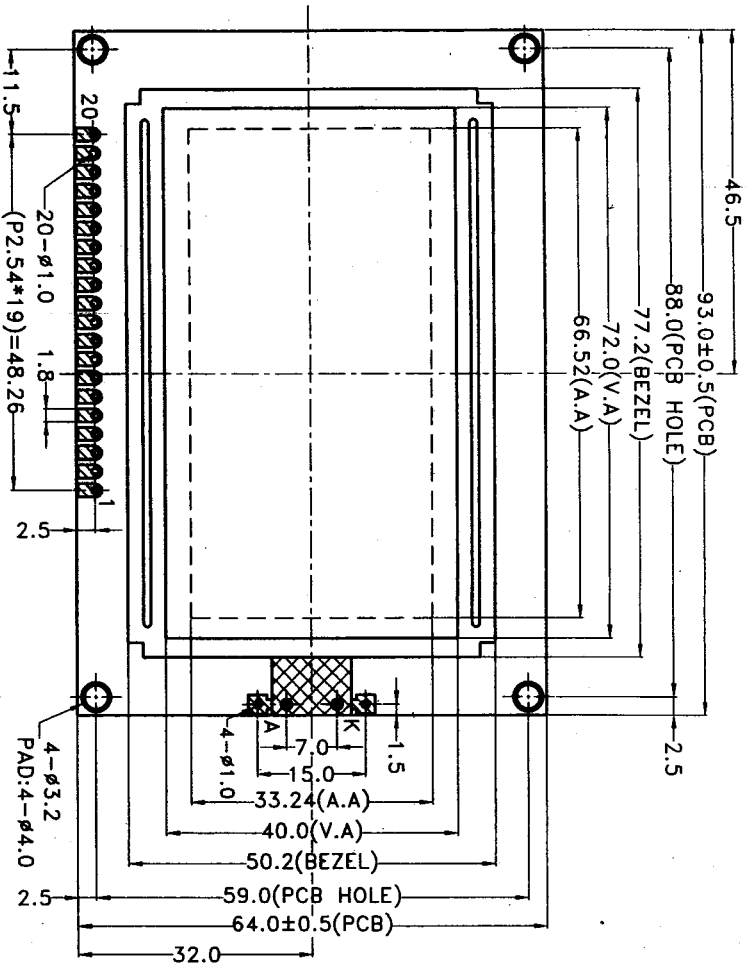

| PIN | SYMBOL | PIN | SYMBOL |
|-----|--------|-----|--------|
| 1 | VSS | 11 | DB4 |
| 2 | VDD | 12 | DB5 |
| 3 | Vo | 13 | DB6 |
| 4 | D/I | 14 | DB7 |
| 5 | R/W | 15 | CS1 |
| 6 | E | 16 | CS2 |
| 7 | DB0 | 17 | /RST |
| 8 | DB1 | 18 | Vout |
| 9 | DB2 | 19 | A |
| 10 | DB3 | 20 | K |

| | |
|--------------------------|-----------------------------|
| Display Type | FSTN/Positive/Transflective |
| Display Resolution | DOTS: 128*64 |
| Viewing Angle | 6:00 |
| Max Ratio and Bias Level | 1/64DUTY, 1/9BIAS |
| LCD Controller/Driver | KS0108B & KS0107B |
| Logic Voltage | 5.0V |
| LCD Driving Voltage | TBD |
| Operation Temperature | 0° C ~ 50° C |
| Storage Temperature | -20° C ~ 70° C |
| Backlight Speciality | BOTTOM LED (V.G) |
| Remark | |



DOTS SIZE
SCALE: 10/1



| | | | |
|---------------------------------------|--------------------------|------------|---------------|
| TITLE: | Module Speciality | | |
| ITEM NO: | M0413 | | |
| PROJECT NO: | GP002-JM12864G-2 (M0413) | | |
| DESCRIPTION: | JM12864GFFPLYNC-06 | | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED: | X.XX±0.3 X.XX±0.2 | | |
| THIRD ANGLE PROJECTION | | | |
| DRAWN | Chen xiao mao | DATE | 06.05.27 |
| CHECKED | Yan xue feng | | |
| APPROVED | Wang zhao cai | | |
| REV: A | UNIT: mm | SCALE: 1/1 | SHEET: 1 OF 1 |

GEL LCD